


Extension module for current sensors

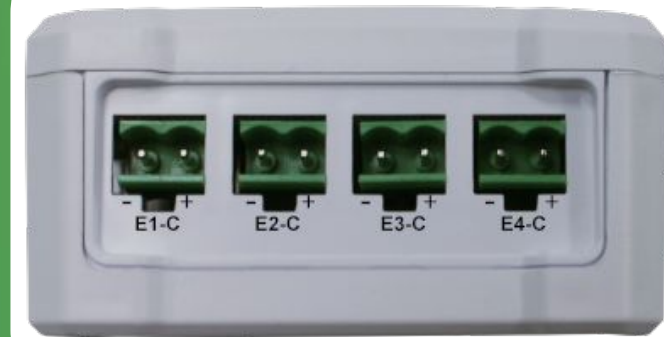

Main characteristics

- Standard 4–20 mA (2-pin) signal reading
- Resettable fuse protection
- Sensor extension to ITS 3G, Endpoint LoRa® or Endpoint IEEE 802.15.4

Applications

- Industry
- Agribusiness
- Smart City
- Healthcare
- Corporate

Overview

ITS 3G, Endpoint LoRa® and Endpoint IEEE 802.15.4, have extension connectors capable of expanding the sensing capacity, increasing even more the intelligence in IoT (Internet of Things) in industries from various segments.

Khomp introduces to the market, the EM C104, an extension module for current sensors, which makes it possible to sensor any quantity in the standard 4-20 mA (with 2 pins).

Some possibilities are: tank temperature measurements, oil pump pressure, also being possible the measurement of carbon dioxide levels and environmental humidity measurements.

This information, once collected, is sent to be analyzed, bringing automated intelligence to the environment where the device was installed.

Available model

Khomp offers the current sensor extender model seen below:

Model	Description
EM C104	<ul style="list-style-type: none"> • Up to four inputs for current sensors.

Technical specifications

Busbar

- One 16-pin connector
- Type: I²C 100 KHz
- Compatible with:
 - ITS 302 and 312 (3G)
 - NIT 20 LI and 21 LI (LoRa®). Compatible with ATC LoraWAN™ Public Network and Private Networks
 - NIR 20 ZI and 21 ZI (IEEE 802.15.4)

Physical/Environmental

- Dimensions of the protective case: 102x77x41 mm
- Weight: 97 g
- Operating temperature: -20 °C to 85 °C
- Operating humidity: 0–90% (not condensed)

Sensor input

- Connector: Pole
- Current range:
 - 4-20 mA (maximum 12.5 V)
- Protection: Resettable fuse

Power

- Source: 11,5–12,5 VDC (**optional use**)
- Connector: Jack P4 (2,1 mm)


Sensor output

- Resolution: 2 decimal places
- Accuracy: 2.5% of full scale 4-20 mA / 25 °C
- Measurement unit: μ A
- Period between measurements: 5 s*

* The factory default sampling period in ITS 3G is 300 s.


* The sampling period in Endpoint LoRa® and Endpoint IEEE 802.15.4 is configurable. Please refer to the product manuals for more details.

Other product images

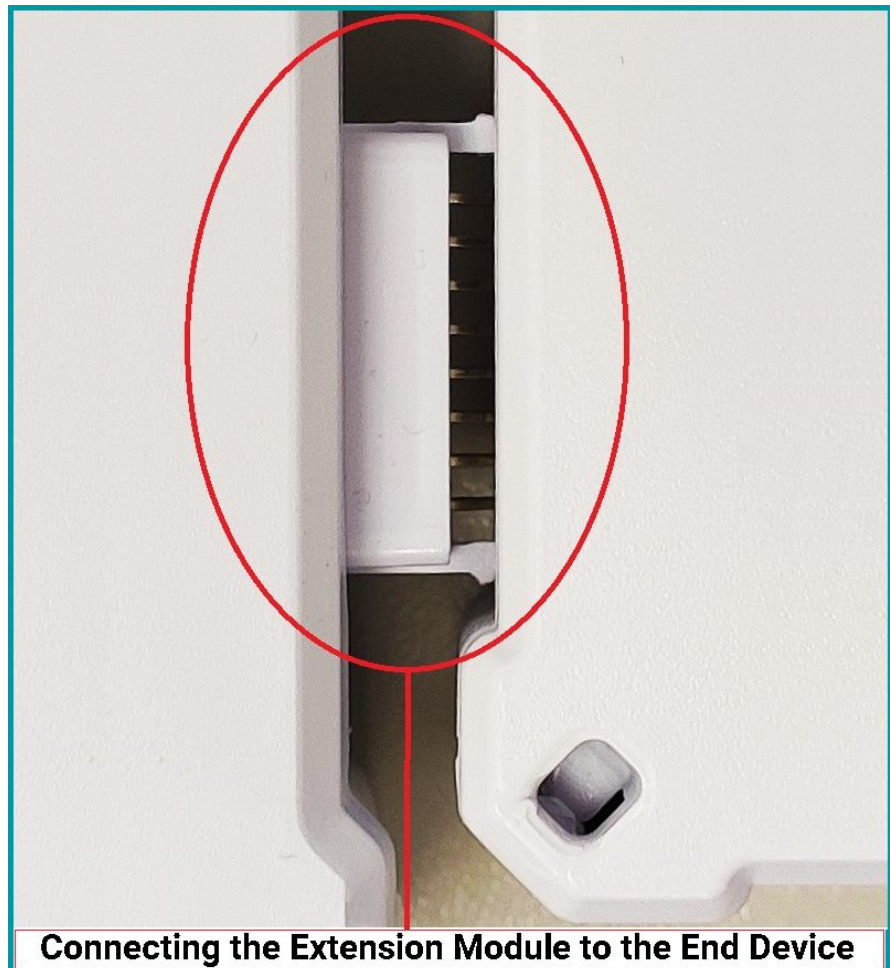


Connecting the Extension Module to the End Device

Application models

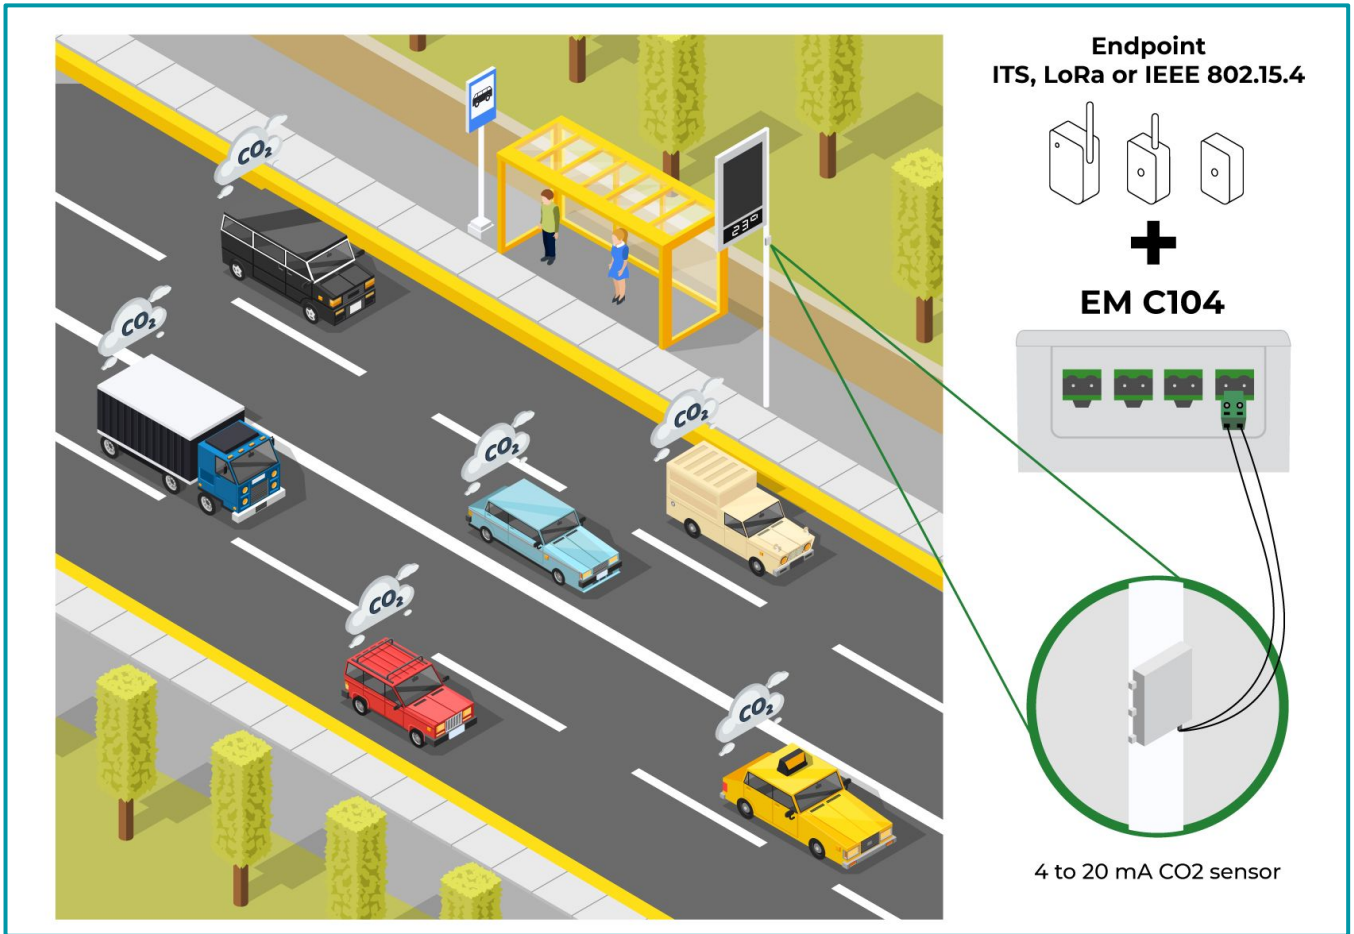


Legend: Attached to an urban structure, the sensor detects the amount of CO2 present in the air and sends the data through the extension cable.

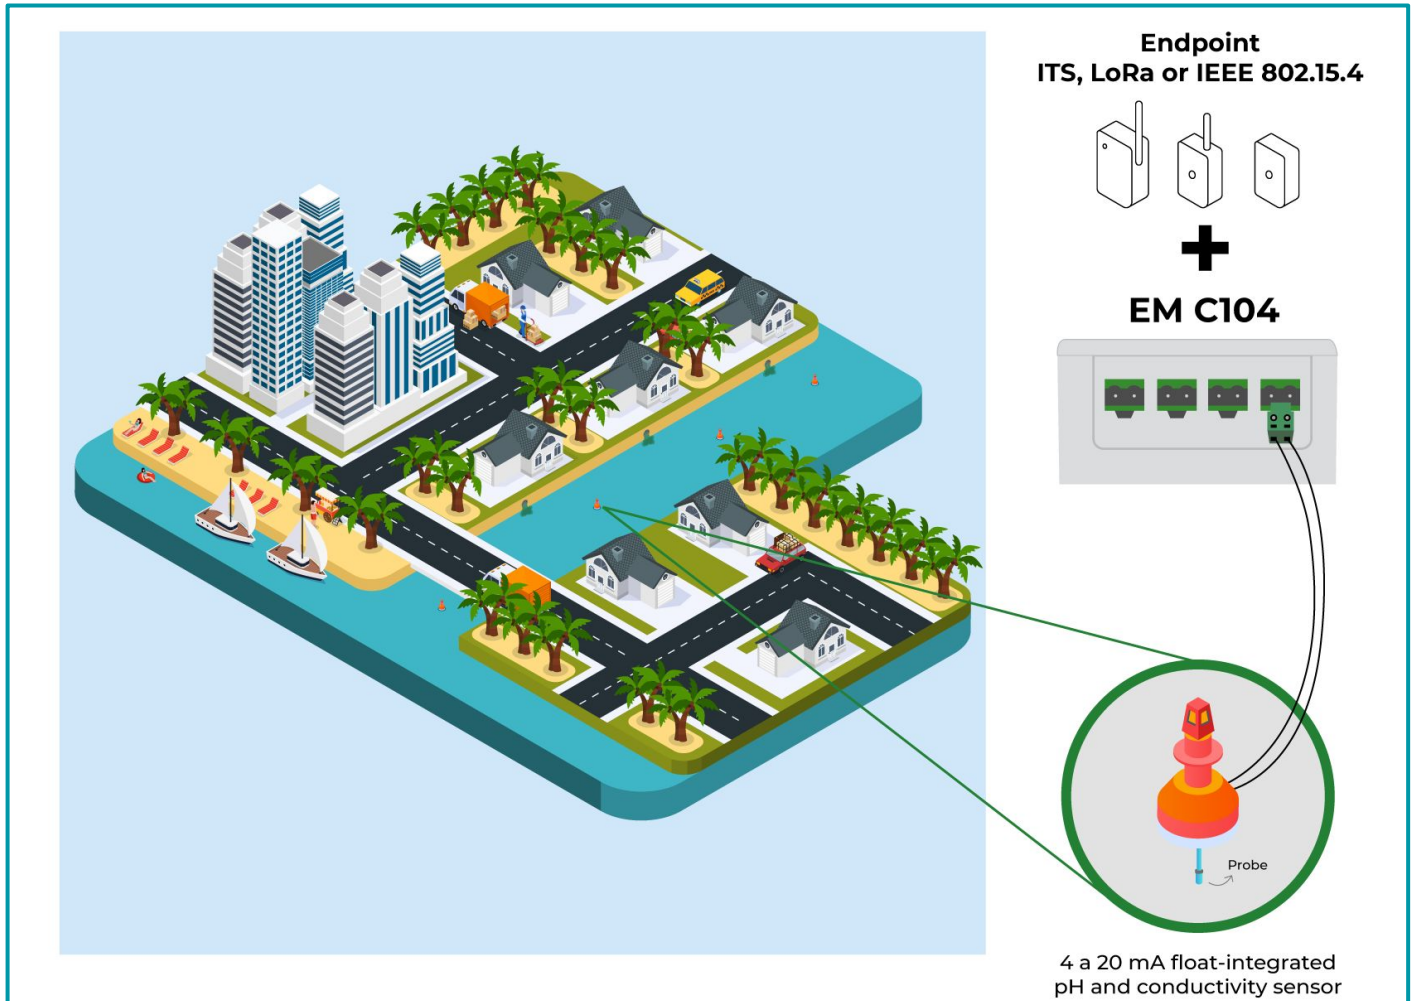

Legend: With the extender integrated into the sensor inside the float, it is possible to measure the pH of the water in that region.

Application model

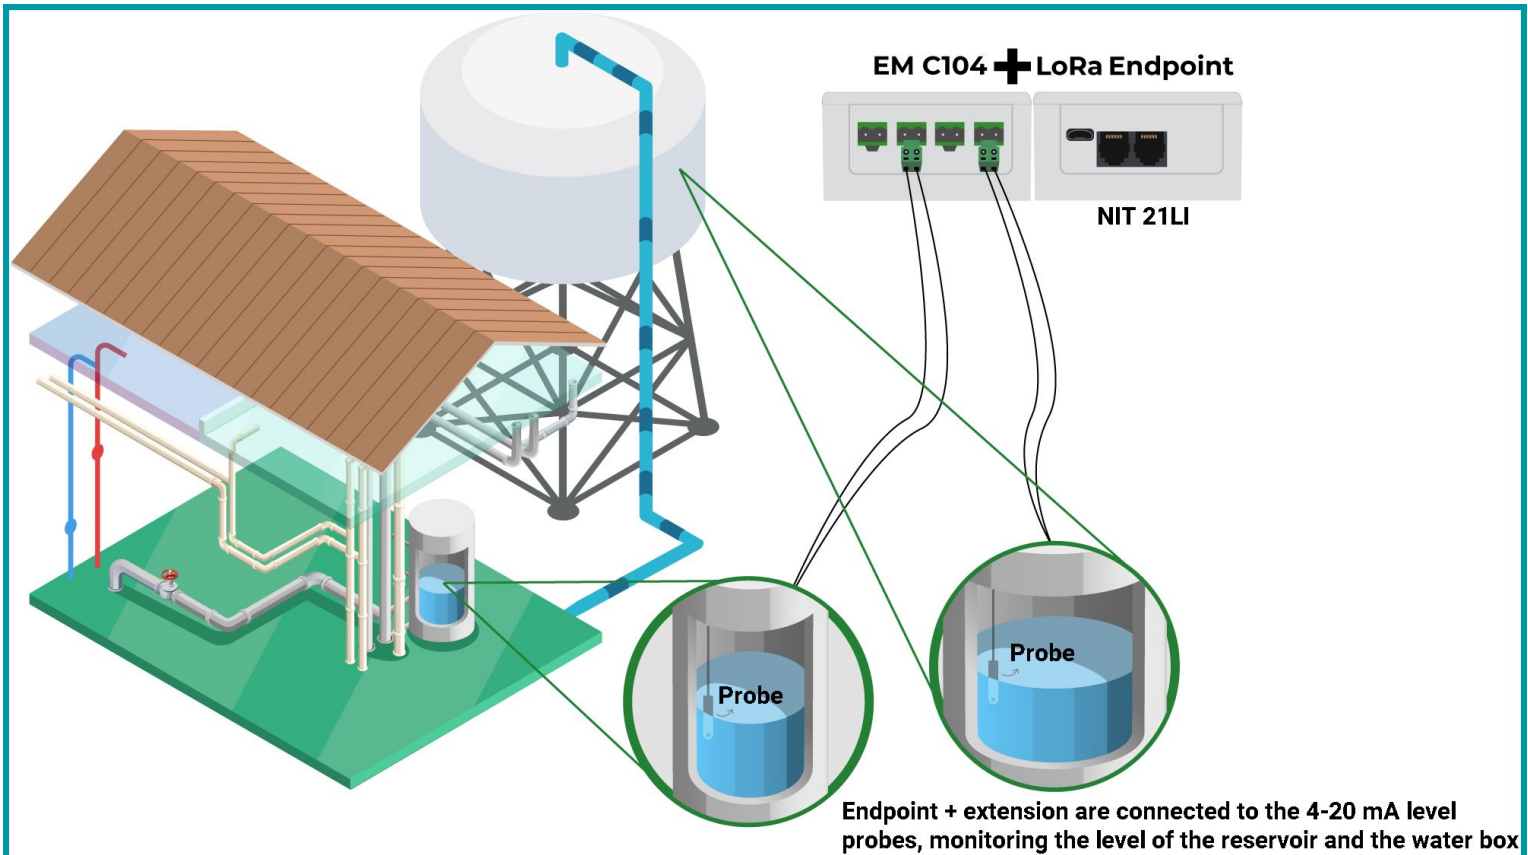

Endpoint + extension are connected to the 4-20 mA level probes, monitoring the level of the reservoir and the water box

Legend: Association with level probes to check the volume of liquid in the reservoir and water tank.